
DIRECT DRIVE IN-LINE COUPLER




GENERAL SHAFT SPECS NEEDED

Shaft Dia.: ______ Assembled Length (L): _____ Material Grade: 17 19 22 22HS

Keyway Slze (Coupler End): ______

Nuts & Keys: *Yes No*Fit: *Loose Fit* or *Tight Fit*

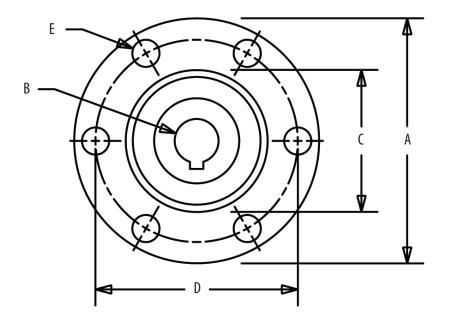

GENERAL COUPLER SPECS NEEDED

Flange O.D. (A):

Bore/Shaft Dia. (B):

Register Dia. (C):

Male or Female

Bolt Circle (D):

Dia. of Bolts (E):

Number of Bolts:

Bore: Tapered or Straight

Transmission Designation:

Your Company:
Your Name:
Phone:
Your Email:
Boat Manufacturer:
Year: Boat Length:

7

Redmond, WA Phone: (800) 526-5971 FAX: (425) 869-1232 Ormond Beach, FL Phone: (386) 677-0687 FAX: (386) 676-3869

Email: info@marinehardware.com

REV. 10/07